TOSOT

XK76 COMMAND CENTER FOR WALL MOUNTED SYSTEMS

Job Name	Location	Date		
Purchaser	Engineer			
Submitted To	For	Reference	Approval	
Unit Designation	Schedule No.			

COMPATIBLE WITH THE FOLLOWING MODELS:



GENERAL FEATURES

- Tactile feedback keypad
- Easy setup and 7 day programming
- Sleek thin design blends into any décor
- Reaches up to 26 feet.
- Convenient LCD display backlighting
 Ready to use cable included.
- No Batteries Required
- 115V or 230V Single Zone Compatible

Indoor Models	Model Numbers		
Lomo TWxxHQxxxx			
Charmo	TWxxHQxxxx		
Pular	TWxxHXxxxx		

XK76 Command Center allows fast & easy access to a large number. The following is a list of typical features and functions support by the X-76 controller:

Note: Some indoor models may not support specific system features or functions. Always refer to the indoor unit Owner's Manual for a complete list of feature and functions.

On/Off - The On/Off button allows you to start and stop the system.

Operating Mode - Allows users to select an operating mode (i.e. Cooling, Heating, Dry, and Fan Only).

Fan Speed -The indoor fan (i.e. High, Medium, Low & Auto) can be adjusted for peak comfort and quietness.

Room Setpoint – Adjust room setpoint temperature between 61 deg F to 86 deg F (16 ~ 30 range).

Timer Mode - Program a One time period (i.e. 0.5-24 hr.) to which the system will turn ON or OFF.

Daily Schedule - Allows 8 programmable time/temperature segments per day.

Weekly Schedule - Allows7-day programming with 8 time/temperature segments per day.

Freeze Guard - Room Freeze Guard protection will maintain room temperature above 460 F.

Sleep Mode – Automatically adjust room temperature during your sleep time (i.e. 0.5-24 hr. range).

Turbo Mode – Turbo will force system to run at higher speeds to reach the desired room temperature faster.

X-Fan Mode - Removes moisture build up on coil when the system is turned OFF to prevent mold and mildew.

Privacy Lock - Privacy Lock to prevent unauthorized access to the controls and tampering with system settings.

Service Codes - Automatically display service codes generated by the system.












XK76 COMMAND CENTER FOR DUCTFREE SPLIT SYSTEMS

DIMENSIONAL SPECIFICATIONS Units: inch (mm) С TOSOT 08:30 10/06/2014 MON ■ 台 韋 ⊕ 중 會 閉 團 ■ ๗ ֍ ♣ ୠ 프 AUTO * 創 示 ۲ **≡**MENU в в SS 0/49 (I 1

Туре	Part Number	А	В	С
XK76	MC20700360	4.375 (111)	4.375 (111)	1.125 (28)

SYSTEM WIRING DIAGRAM

Units: inch (mm)

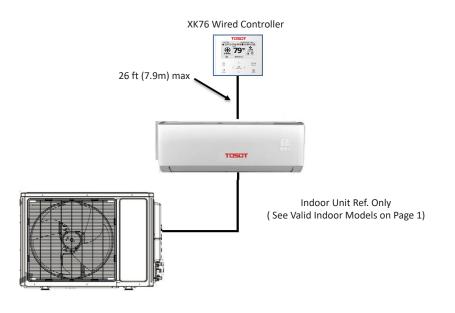





R410A INVERTER

