

MULTI-ROOM DUCTLESS SYSTEMS

9000 BTU / H MINI FLOOR CONSOLE UNIT

SUBMITTAL DATA: TM09HEDI

Job Name	Location		Da	ite	
Purchaser	Engineer				
Submitted To	For	□ Reference	Approval	Construction	
Unit Designation	Schedule No.				





GENERAL FEATURES

- Quiet Operation -Multi-Speed Fan
- Swing LouversWireless Remote Controller
- Remote Control Lockout
- Limited 10 Year Parts & 10 Years Compressor
- Warranty-Residential & Commercial

SYSTEM RATINGS		PHYSICAL SPECIFICATIONS		
Cooling*		Unit Dimensions (LxHxD)	27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm	
Rated Capacity	8,874 BTU/H	Weight (Net/Shipping)	33/40 LBS	
Heating*		Drain Size (OD) 0.67-in 17-mm		
Rated Capacity	9,556 BTU/H			
Sound Level (Hi/Lo)**				
Cooling	40/25 dbA			
Heating	40/25 dbA			
Air Flow (max)				
Indoor Fan CFM	294 CFM			
* Capacity based on diversity of all conn	ected units and the OD Unit			
ELECTRICAL RATINGS		REFRIGERANT PIPING DATA		
Fan Motor		Refrigerant Type	R410A	
Output Power	30 W	Gas Pipe Size (OD)	3/8-in	
FLA	0.36 A	Liquid Pipe Size (OD)	1/4-in	
Power Supply	Power Supply		Flared	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz	* Test conditions are based on AHRI 210/240. **Sound Pressure ratings are per AHRI 270 and AHRI 350		
Voltage Range	187 - 253 V			
MCA	1.0 A			
Interconnecting Cable Wire Size	14-4 AWG			












DIMENSIONAL SPECIFICATIONS: TM09HEDI

9,000 BTUH MODEL

Model: TM09HEDI 9,000 BTUH 230V

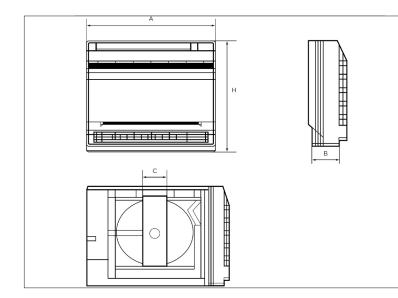


Dimensions				
	A	В	С	н
mm	700	215	200	600
in	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port sizes.

MINIMUM & MAXIMUM CLEARANCES

Wc = inches of water column

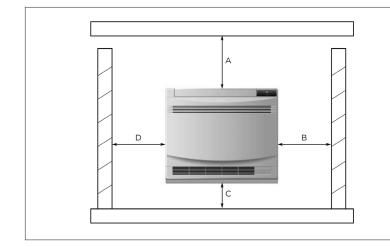

	Dimensions				
	A	В	С	D	
mm	1500	610	150	610	
in	59	24	6	24	

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors Wire.

2. Power wiring cable size must comply with applicable national and local codes.

3. Test conditions are based on AHRI 210/240.







