

MULTI-ROOM DUCTLESS SYSTEMS

12000 BTU / H MINI FLOOR CONSOLE UNIT

SUBMITTAL DATA: TM12HEDI Job Name Location Date Purchaser Engineer Submitted To For Reference Approval Construction Unit Designation Schedule No.





GENERAL FEATURES

- Quiet Operation -Multi-Speed Fan
- Swing Louvers
- Wireless Remote Controller
- Remote Control Lockout
- Limited 10 Year Parts & 10 Years Compressor Warranty-Residential & Commercial

Schedule No.				
SYSTEM RATINGS		PHYSICAL SPECIFICATIONS		
Cooling*		Unit Dimensions (LxHxD)	27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm	
Rated Capacity	11,946 BTU/H	Weight (Net/Shipping)	33/40 LBS	
Heating*		Drain Size (OD)	0.67-in 17-mm	
Rated Capacity	12,969 BTU/H			
Sound Level (Hi/Lo)**				
Cooling	42/27 dbA			
Heating	42/27 dbA			
Air Flow (max)	Air Flow (max)			
Indoor Fan CFM	353 CFM			
* Capacity based on diversity of all conn	ected units and the OD Unit			
ELECTRICAL RAT	ELECTRICAL RATINGS		REFRIGERANT PIPING DATA	
Fan Motor		Refrigerant Type	R410A	
Output Power	30 W	Gas Pipe Size (OD)	3/8-in	
FLA	0.36 A	Liquid Pipe Size (OD)	1/4-in	
Power Supply		Connection Method	Flared	
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz	* Test conditions are based on AHRI 210/240. **Sound Pressure ratings are per AHRI 270 and AHRI 350		
Voltage Range	187 - 253 V			
MCA	1.0 A			
Interconnecting Cable Wire Size	14-4 AWG			














DIMENSIONAL SPECIFICATIONS: TM12HEDI

12,000 BTUH MODEL

Model: TM12HEDI 12,000 BTUH 230V

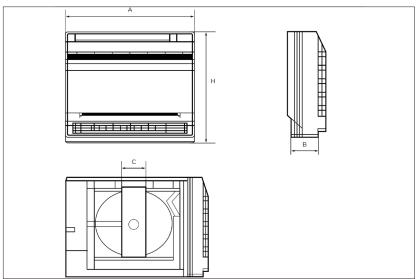


Note

Note: Size refrigerant lines based on evaporator port sizes.

Dimensions						
	A	В	С	Н		
mm	700	215	200	600		
in	27.6	8.5	7.875	23.6		

MINIMUM & MAXIMUM CLEARANCES

Wc = inches of water column

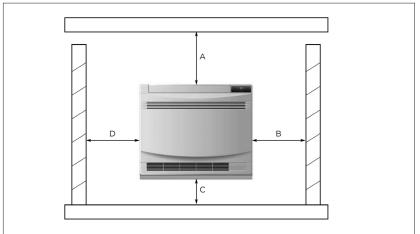

Dimensions						
	A	В	С	D		
mm	1500	610	150	610		
in	59	24	6	24		

Notes:

- 1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors Wire.
- 2. Power wiring cable size must comply with applicable national and local codes.
- 3. Test conditions are based on AHRI 210/240.









